






Uniquely engineered bit loader and escapement allow the operator a more ergonomic and natural range of motion.



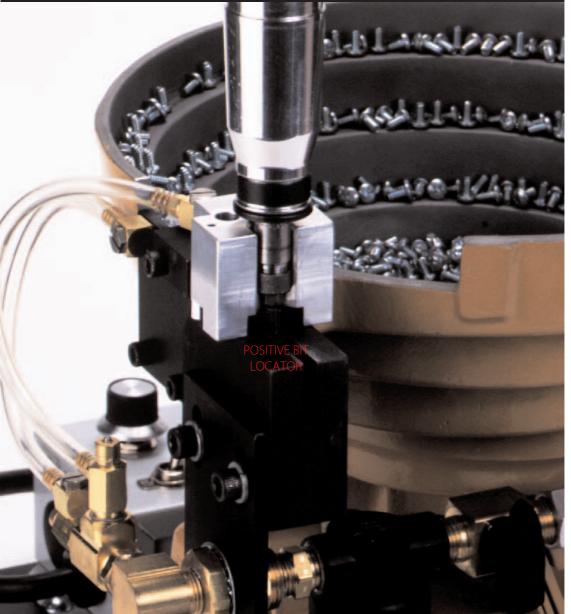


Simple and durable in design.



1607 NORFOLK PLACE SW CONOVER, NC 28613 800 948 1038 828 328 4127 fax designtoolinc.com

sales@designtoolinc.com

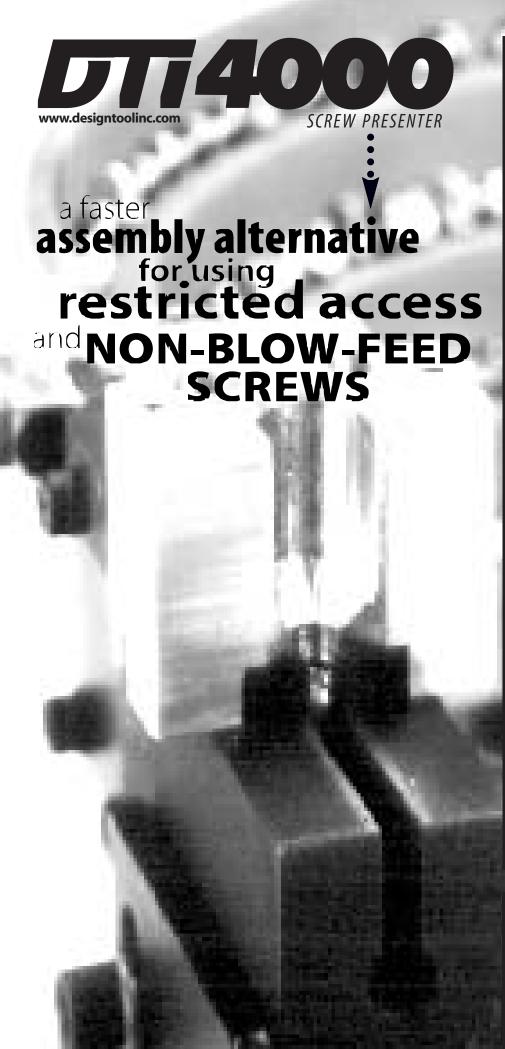

## SPECIAL FEATURES

### Positive bit locator—

 Promotes fast and easy assembly, reduces operator fatigue with a more ergonomic, natural range of motion.

# Air-assisted tracking—

- > Pushes screws into position at the fastest speed available.
- Heavy-duty vibrating bowl-feeder provides years of trouble-free service.
- > Incorporates both magnetic and vacuum pick-up.
- > Designed for use with magnetic bits and bit holders.
- > Accommodates internal drive screws #2 through #12.
- > Utilizes no moving parts in screw presentation.
- > Requires minimal maintenance.

### **SPECIFICATIONS**

- > Feeder bowl: 10" cast aluminum.
- > Feed rate: 40-60 screws per minute.
- > Locator block: Aircraft alloy aluminum (STANDARD DESIGN).
- > Power requirements: 110 volt AC @ 5 amps.
- > Air requirement: 50 psi.
- > Escapement height: 10" from tabletop to pick-up point.
- > Base size: 14" x 10".
- > Warranty: 6 months.

### **AVAILABLE OPTIONS**

- > Nylon-coated or stainless steel feeder bowl.
- > Stainless steel locator block.
- > Vibrating-bowl timer.

DESIGN TOOL ws INC.

1607 NORFOLK PLACE SW • CONOVER, NC 28613 800 948 1038 828 328 4127 fax designtoolinc.com sales@designtoolinc.com

© DESIGN TOOL, INC.